

AirMaestro RF Signal Analyzer Mini PCI card

General Description

The BSP2500-MPCI is a radio frequency (RF) signal analyzer in a Mini PCI form factor, providing real-time spectrum analysis and interference classification of RF signals. Based on the Bandspeed BSP2500 Integrated Circuit (IC), the BSP2500-MPCI performs frequency-domain and time-domain analysis of RF energy in the 2.4 and 5 GHz WLAN frequency bands. Sophisticated classification algorithms embedded in the IC can detect and identify the source of many kinds of RF interference. The Mini PCI card covers all 802.11abgn bands as well as the 4.9GHz public safety band. A single u.fl antenna connector is used for connection to a dual-band antenna.




Type IIIA Mini-PCI Card

Key Features

- 40MHz analysis bandwidth
- 80MHz sampling frequency
- 156.25KHz resolution
- -90dBm to 0dBm detection range
- Time-domain and frequency-domain analysis
- 802.11 preamble detection (OFDM and DSSS)
- Estimates channel utilization for both 802.11 and non-802.11 traffic
- Embedded classification processor
- Embedded memory
- Embedded AGC (hardware and firmware)
- Embedded PCI bridge
- Embedded PLL provides flexible clocking options
- Highly-programmable including scan/dwell times, detection thresholds and spectral windowing.
- Detects and classifies the following RF interferers
 - Microwave ovens (conventional)
 - Microwave ovens (inverter)
 - Wireless video cameras (analog and digital)
 - Analog cordless phones
 - FHSS cordless phones
 - DSSS cordless phones
 - Bluetooth devices
 - Wireless baby monitors
 - Wireless gaming controllers
 - RF Jammers
 - Motion Detectors (S-Band radar-based)
- 1-4 second typical classification time
- Real-time spectrum analysis with hardware peak hold

Technical Specifications

Model Name	Bandspeed AirMaestro RF Signal Analyzer mini PCI card
Dimensions (L x W x H)	Type IIIA: 50.95 x 59.6 x 2.67mm
Connector Interface	Mini PCI Type III edge connector
Antenna Interface Connector	u.fl
Frequency Bands Supported	Low Band – 2.4 GHz to 2.5 GHz High Band – 4.9 GHz to 5.875 GHz
WLAN Channels supported	2.4 GHz: 1 – 14 5 GHz: 36 – 161
Mini PCI card interface	PCI v2.2, 32-Bit, 33/66 MHz
Voltage	3.3 V
Operating Temperature	0 to +70° Celsius
Power Consumption (typical)	Standby: 340 mW Active: 1119 mW


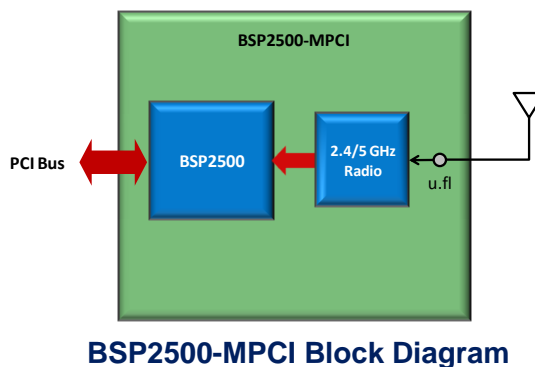


Bandspeed AirMaestro RF Signal Analysis Software

Bandspeed AirMaestro RF Signal Analysis Software consists of device drivers and software modules to be integrated with the target system's software stack. Included are software modules providing active displays for WLAN Channel Management and an RF Interference Log. For WLAN access points, software supporting Bandspeed Listen+Learn® AICS (Automated and Intelligent Channel Selection) for dynamic RF interference avoidance is included.

Channel Management Display

The Channel Management Display provides visibility into the calculated channel quality for each of the WLAN channels (top chart), as well as the level of interference detected on each channel (bottom chart). The interference is differentiated between WLAN interference and non-WLAN interference on the bottom chart, along with the channel utilization percentage from each type of interference.

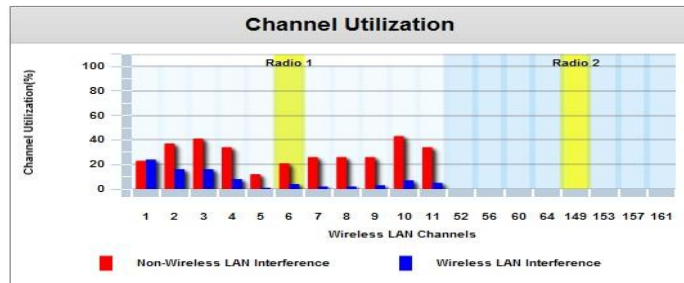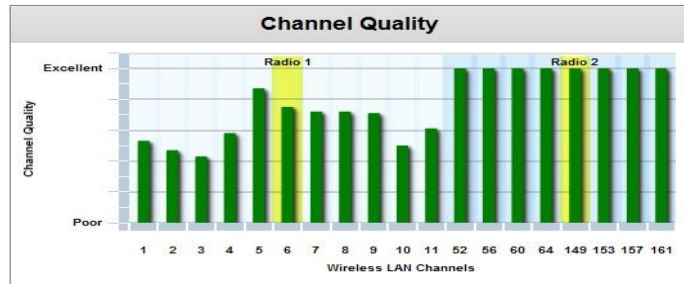

Also shown on the display is the WLAN channel on which the access point's WLAN interface/radio is operating. In the case where the AirMaestro RF Signal Analyzer is embedded into an access point with multiple WLAN interfaces, multiple radios and their respective channels are displayed.

Interference Log

AirMaestro RF Signal Analyzer solutions automatically classify RF interference from multiple sources and create interference logs of current and historical interference detected.

Details on each interferer include type of interferer, signal strength (current, average, maximum), impacted WLAN channels, start time, end time and duration of interference. When an interferer is detected, a log entry is created in the interference log. While an interferer is active, the status indicator in the log entry is red and the text for the log entry is bold. When an interferer becomes inactive, the associated status indicator changes to gray and the log entry text changes to non-bold.

Interferer	Strength Cur/Avg/Max	Channels	Duration	Start Time	Stop Time
Inverter Microwave...	-85 / -85 / -85	3,4,5,6,7,8,9	00:00:...	Fri Dec 11 2009 0...	-
Wireless Video C...	-69 / -70 / -68	2,3,4,5,6,7,8	00:02:...	Fri Dec 11 2009 0...	-
Inverter Microwave...	-77 / -77 / -40	1,2,3,4,5,6,...	00:04:...	Fri Dec 11 2009 0...	Fri Dec 11 2009 ...
Illegal jamming d...	-91 / -91 / -91	1,2,3	00:00:...	Fri Dec 11 2009 0...	Fri Dec 11 2009 ...

Related Products

This section lists the other related products from Bandspeed.

Part Number	Description
BSP2500	AirMaestro BSP2500 RF Signal Analyzer Integrated Circuit

No license, expressed or implied to any intellectual property rights is granted by this document. While every attempt has been made to assure that the information presented in this document is accurate, Bandspeed, Inc. assumes no liability whatsoever relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright or other intellectual property right. Bandspeed, Inc. reserves the right to make changes to specifications and product descriptions at any time, without notice.